



## Reconfiguring LDAP Directory for Thunderbird

- Open the Thunderbird Application and Click on Tools and then Select Options from the list available.

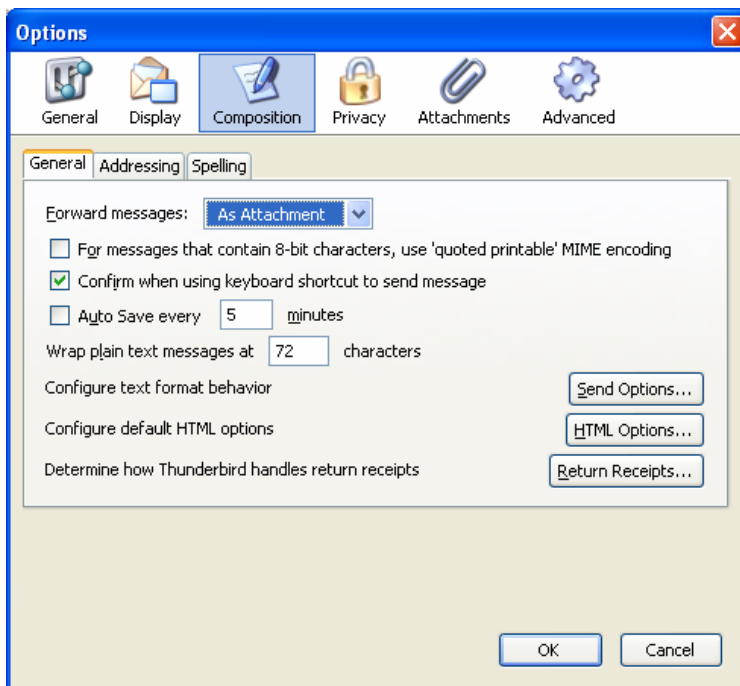

- Once there Click on the Addressing Tab.

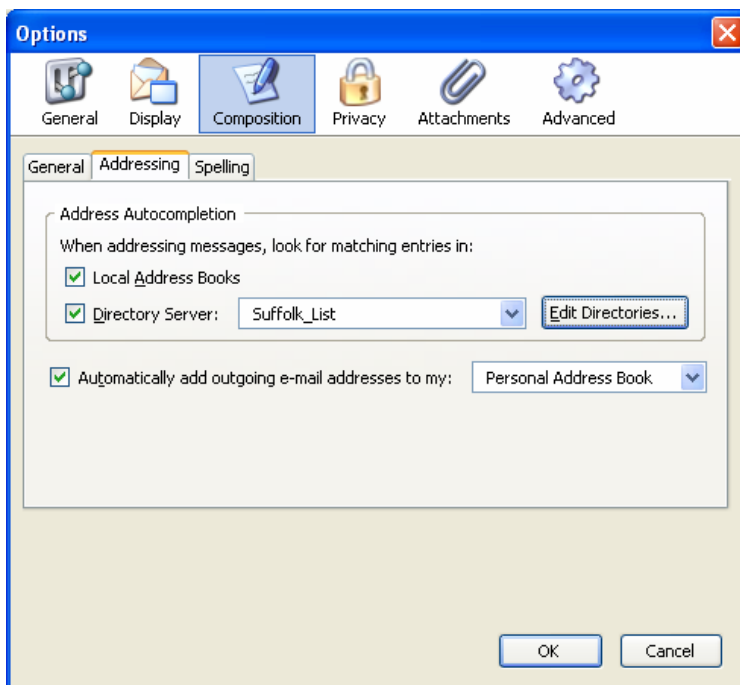


- Click on Edit Directories.
- You will be presented with a new window where you will want to select the current directory and Click on Edit



- A new window will open where you will be provided the following information:
  - **Name:** Suffolk\_List
  - **Hostname:** idigress.suffolk.edu
  - **Base DN:** o=suffolk university,c=Us
  - **Port:** 389
  - **Bind DN:** (Should be empty)

Change of this information to the New LDAP Settings Below.

- **Name:** Suffolk Contacts
  - **Hostname:** sumail.suffolk.edu
  - **Base DN:** dc=suffolk,dc=edu
  - **Port:** 389
  - **Bind DN:** (Should be empty)
- Compare with image below.

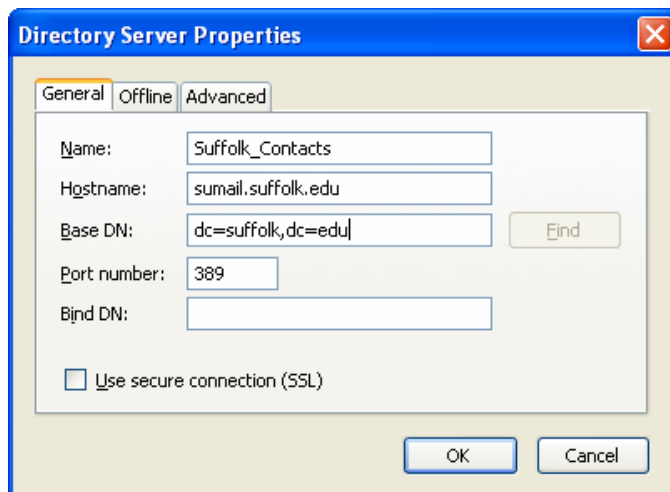

- Click on Ok, Ok, and Ok again to exit the Options windows.